

# Package Systems




## Complete House Units pre-wired and pre-piped — instant fire suppression

- Engine combustion air intake vent
- Battery operated emergency lights
- A115V thermostat control ventilating fan
- Single point power connection
- Exterior photocell sodium vapor light
- Pre-piped sprinkler systems for pump house interior
- GFCI utility electrical outlets provided
- Base is provided with optional lifting provisions
- Building heater

**All A-C Fire Pumps are performance and hydrostatically tested in accordance with the requirements of NFPA #20 and are supplied as standard with a packed stuff box, grease lubricated bearings and cast iron/bronze fitted materials of construction.**

## Vertical Turbine Package

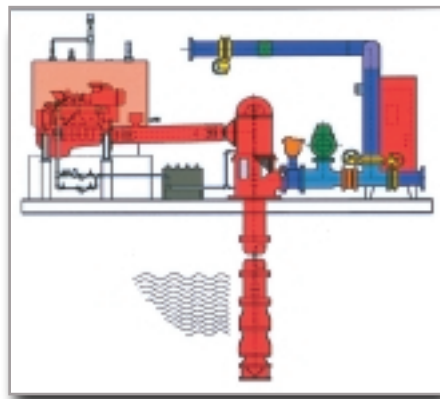

NFPA #20 requires the use of a vertical turbine on systems operating under a static suction lift condition requirement. A-C Fire Pump Systems offers the complete pre-packaged system, pump, driver, controller, low measuring device, control valves, check valves, sensing lines and power distribution panel. This system requires one electrical connection and a water supply. **It's ready to provide immediate, reliable fire protection.**